

Data Acquisition System **GM**



**SMARTDAC+**®

*Data Acquisition & Control*

Bulletin 04L55B01-01EN

[www.smartdacplus.com](http://www.smartdacplus.com)

**vigilantplant.**®  
The clear path to operational excellence

**YOKOGAWA** ◆

# **SMARTDAC+**<sup>®</sup>

## **Data Acquisition & Control**

Your business environment is complex and rapidly changing.  
You need smart and powerful systems that can adapt to your process.  
**SMARTDACPLUS** is a fresh approach to data acquisition and control,  
with smart and simple touch operation as a design priority.  
Measure, display and archive process data with greater  
levels of clarity, intelligence and accessibility.  
The **SMARTDACPLUS** concept started with the GX/GP,  
an integrated I/O and recording system  
with a familiar touch operator interface.  
Building upon the **SMARTDACPLUS** product family is  
the highly adaptable, scalable and easy to  
operate GM data logger.

**Now that's SMART.**



# Precise, Reliable &

Decades of Yokogawa's innovative measuring technology has resulted in a flexible data logger that offers both reliability and ease of use.

### ● Scalability

- Up to 420 ch per system
- Plug and lock modules

### ● Ease of Use

- Web-based configuration
- Live Web-based data viewing

### ● Mobile Connectivity

- Bluetooth
- Mobile Application

### ● Open Network


- Modbus, EtherNet/IP, SLMP,  
and OPC-UA server

### ● Reliability

- Secure data storage
- High accuracy measurement

### ● Noise Tolerance

- Electromagnetic relay module

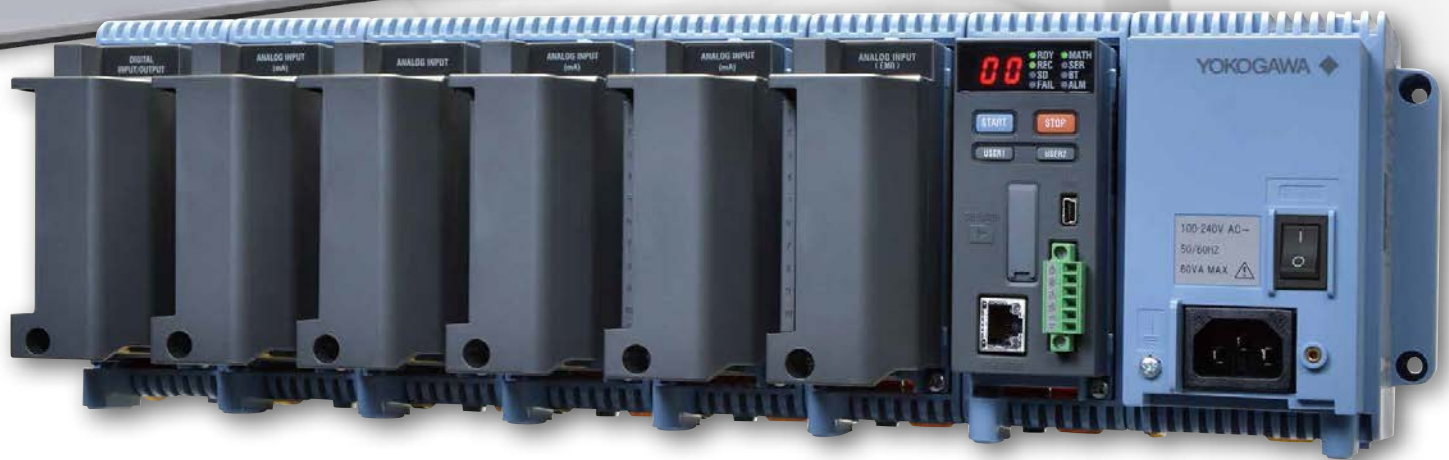

# Adaptable

*Enables a scalable data acquisition system*

## Smart Architecture



*Provides a smooth, familiar user experience*

## Smart User Interface



*Offers a seamless data transfer environment*

## Smart Functionality



# Smart Architecture



Enables a scalable data acquisition system

## ● Increase channels by adding additional block modules

YOKOGAWA proprietary block architecture (patent pending)

- Expand one, or multiple module at a time
- Unique design houses modules in linked module bases
- Module base ensures linkage (slide locks and mounting screws also available)
- Modules can be inserted and removed from the front panel for easy maintenance

### Names of data acquisition module parts

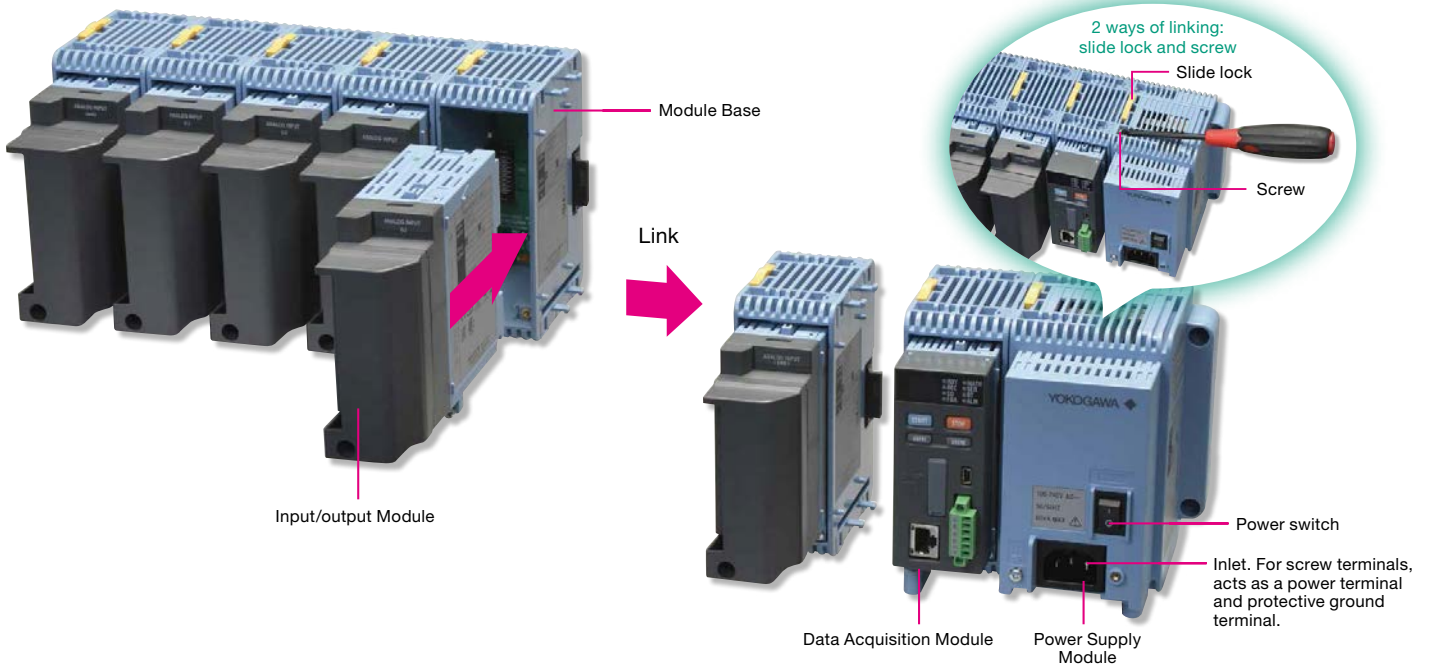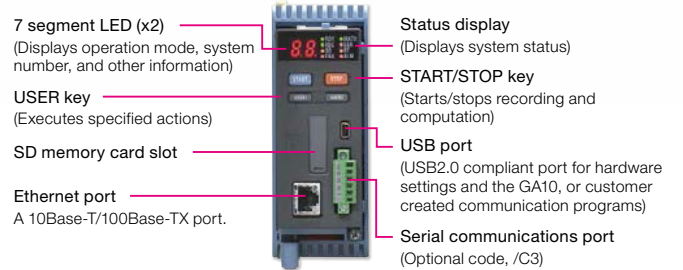

## ● Comes standard with support for up to 100 ch of measurement (single-unit configuration)

Up to 10 I/O modules can be linked to a single data acquisition module (GM10)



## ● Installs anywhere

For the desktop, DIN rails, or wall-mounting. No special attachments required.

### Desktop



### Mounted on DIN rails



### Wall-mounted



## Select from a wide range of I/O modules

Select modules according to your application. Noise-resistant, magnetic relay types also available. All modules have removable terminal blocks for easy wiring. The same modules used in the SMARTDAC+ series.



Input/output terminals are removable. Cuts down on rewiring time.



SMARTDAC+ series

Model	Name	Measurement/Application	Channels
GX90XA-10-U2	Analog input module	DC voltage, thermocouple, RTD, contact (semiconductor relay scanner type)	10
GX90XA-10-L1		DC voltage, thermocouple, contact (low withstand voltage)	10
GX90XA-10-T1		DC voltage, thermocouple, contact (electromagnetic relay scanner type)	10
GX90XA-10-C1		DC current (mA)	10
GX90XD	Digital input module	Remote control input, operation recording, or pulse input	16
GX90YD	Digital output module	Alarm output	6
GX90WD	Digital input/output module	Remote control input, operation recording or pulse input/ alarm output	DI:8/DO:6
GX90XP	Pulse Input Module	Pulse signal data acquisition and integral count	10

### Analog input module scan interval and measurement type

Type	Channels	Scan interval (shortest)	Scanner	TC	RTD	DCV	DI	mA	Feature
Universal (-U2)	10	100ms	SSR	✓	✓	✓	✓		Universal
Low withstand voltage relay (-L1)	10	500ms	SSR	✓		✓	✓		Mid-price
Electromagnetic relay (-T1)	10	1s	Relay	✓		✓	✓		Noise-resistance
DC current input (-C1)	10	100ms	SSR					✓	mA only

✓ : Available

### Internal memory and max. I/O channels

Type	Internal memory	Max. input/output channels	
GM10-1	500MB	Single-unit configuration	0 to 100
		Multi-unit configuration	0 to 100
GM10-2	1.2GB	Single-unit configuration	0 to 100
		Multi-unit configuration	0 to 420

## Actual values support high precision measurement

Input type	Measuring accuracy <sup>1)</sup> (typical value <sup>2)</sup> )
DCV	20mV ± (0.01% of reading + 5 μV)
	60mV ± (0.01% of reading + 5 μV)
	6V (1-5 V) ± (0.01% of reading + 2 mV)
TC <sup>3)</sup>	R ± 1.1°C
	K ± (0.01% of reading + 0.2°C) However, -200.0 to 0.0°C : ± (0.15% of reading + 0.2°C)
	K (-200 to 500 °C) ± 0.2°C However, -200.0 to 0.0°C : ± (0.15% of reading + 0.2°C)
	J ± 0.2°C However, -200.0 to 0.0°C : ± (0.10% of reading + 0.2°C)
	T ± 0.2°C However, -200.0 to 0.0°C : ± (0.10% of reading + 0.2°C)
RTD	N ± (0.01% of reading + 0.2°C) However, -200.0 to 0.0°C : ± (0.22% of reading + 0.2°C)
	Pt100 ± (0.02% of reading + 0.2°C)
	Pt100 (high resolution) ± (0.02% of reading + 0.16°C)

The measuring accuracies noted in the general specifications on page 13 have a margin of error that takes into account the product's components and the equipment used for adjustment and testing. However, the actual values calculated from the accuracy testing data upon shipment of the instrument from the factory are listed to the left.


<sup>1)</sup> Applies to GX90XA-10-U2, A/D integration time 16.67 ms or more, General operating conditions: 23±2 °C, 55±10% RH, supply voltage 90-132, 180-264 V AC, power frequency within 50/60 Hz ±1%, warm-up of 30 minutes or more, no vibrations or other hindrances to performance.

<sup>2)</sup> For the measuring accuracy (guaranteed), see the module's general specifications (GS 04L53B01-01EN).

<sup>3)</sup> These values do not include the reference junction compensation accuracy.

## Support measurement of up to 420 ch (actual input) by expanding channels across multiple units (multi-unit configuration)


Expand up to 420 ch by using the GX90EX expansion module. (GM10-2) On the GM10-2 large capacity type, up to 1000 ch are available for recording when including MATH and communication channels. Connect units with Ethernet cables for dispersed installations.

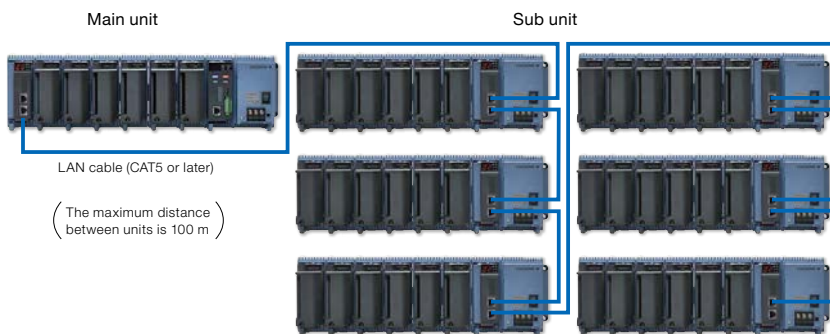

Chain up to 6 units

### Reduce wiring with distributed installation

When the data logger is installed offsite (away from the DUT), you can place the sub unit at the site and monitor data without the need for long-distance wiring of thermocouples and other sensors.

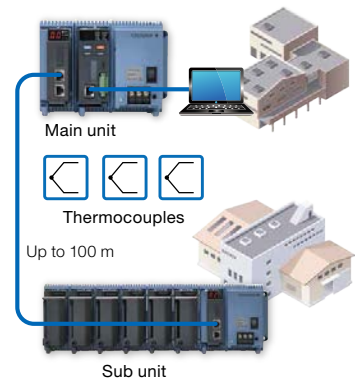


# Smart User Interface

Provides a smooth, familiar user experience

## Easy access from a Web browser

Through a Web browser you can monitor the GM in real time and change settings. You can easily build a seamless, low-cost remote monitoring system with no additional software.

### Real time monitoring screen

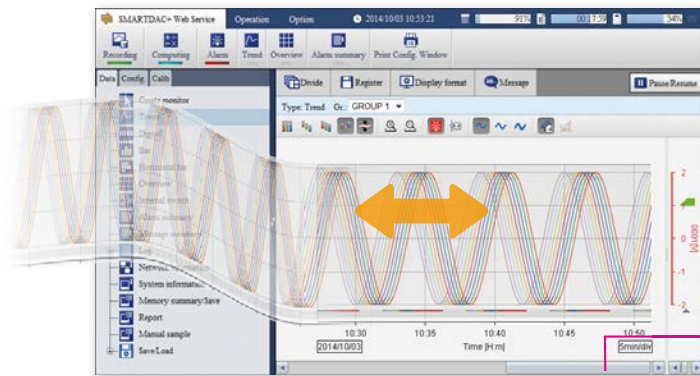

With the scroll bar, you can seamlessly scroll between past and current trends.

### Enter settings online with a web browser

CH	Type	Range	Span Lower	Span Upper	Calculation
0001	Volt	2V	-2.0000	2.0000	Off
0002	Volt	2V	-2.0000	2.0000	Off
0003	Volt	2V	-2.0000	2.0000	Off
0004	Volt	2V	-2.0000	2.0000	Off
0005	Volt	2V	-2.0000	2.0000	Off
0006	Volt	2V	-2.0000	2.0000	Off
0007	Volt	2V	-2.0000	2.0000	Off
0008	Volt	2V	-2.0000	2.0000	Off
0009	Volt	2V	-2.0000	2.0000	Off
0010	Volt	2V	-2.0000	2.0000	Off

The setting screen lets you copy AI channel settings and other information to Excel for editing. You can reimport the data into the setting screen after editing.

A	B	C	D	E	F	G	H	I	J	K	L
1	1	RTD	Pt 00	0	150	Off	1	2	0	100	off
2	2	RTD	Pt 00	0	150	Off	1	2	0	100	off
3	3	RTD	Pt 00	0	150	Off	1	2	0	100	off
4	4	RTD	Pt 00	0	150	Off	1	2	0	100	off
5	5	RTD	Pt 00	0	150	Off	1	2	0	100	off
6	6	RTD	Pt 00	0	150	Off	1	2	0	100	off
7	7	RTD	Pt 00	0	150	Off	1	2	0	100	off
8	8	RTD	Pt 00	0	150	Off	1	2	0	100	off
9	9	RTD	Pt 00	0	150	Off	1	2	0	100	off
10	10	RTD	Pt 00	0	150	Off	1	2	0	100	off
11											

### Trend, digital, and other real-time displays

Trend

Bar graph

Alarm/Message/Memory summary

Digital

1.7321	0.5176	-1.0000	-1.9319
1.4142	0.0000	-1.4142	
1.0000	-0.5176	-1.7321	


Overview

8.1647	-1.9321
-0.4136	-1.9373
-0.3680	-1.9353
-1.3303	-1.7630
-1.8770	-1.8861

## Dedicated software (free download) is available for loading waveforms and GM settings

### Universal viewer


Data files saved on the GM can be viewed and printed. You can perform statistical computation over an area and export to ASCII, Excel, or other formats.

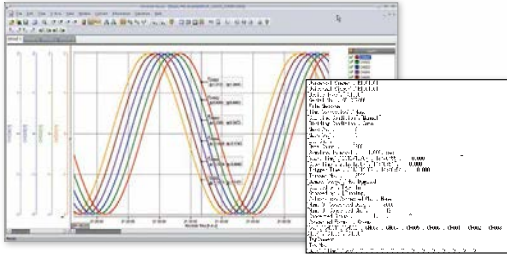

Data converted to an ASCII file

### Offline setting software

Save settings or transfer them to the GM. Connections can also be made easily via USB or Bluetooth.

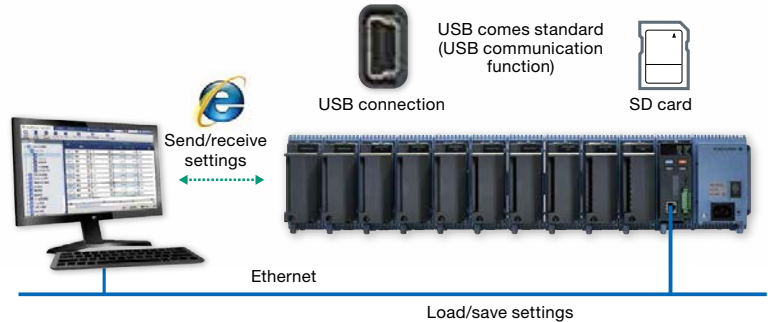

## Safe to use in a wide range of temperatures

With operating temperatures of  $-20^{\circ}\text{C}$ – $60^{\circ}\text{C}$ , it supports a wide range of applications in varying installation environments.



Environmental testing

## Monitoring and settings can also be done on a tablet


Supports Bluetooth (optional code /C8)  
You can enter settings or monitor from a tablet without ever bringing a PC to the site.  
Dedicated applications is available for free download. For more information, visit our website.

### Enables monitoring via Bluetooth



Bluetooth supports Android only.  
Wi-Fi supports both Android and iOS.

### Enables monitoring via Wi-Fi

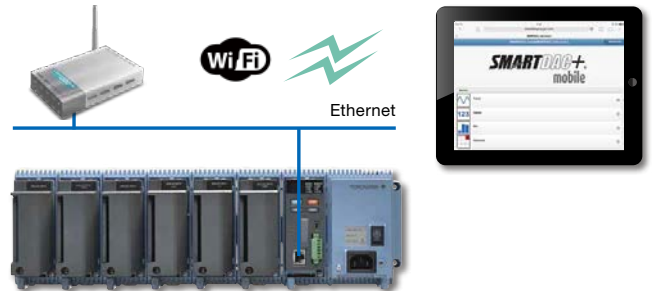



## Powerful applications

### Bluetooth connection

Simple to use for in-vehicle testing.

### USB connection

Service staff can easily perform maintenance on the GM.

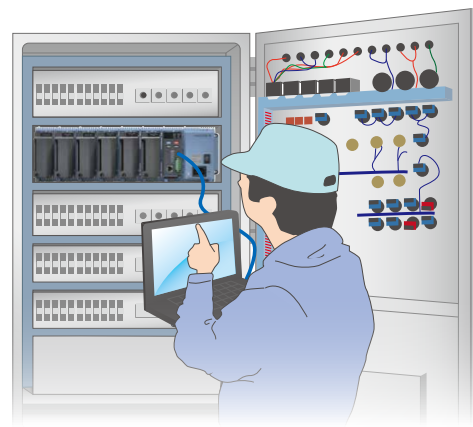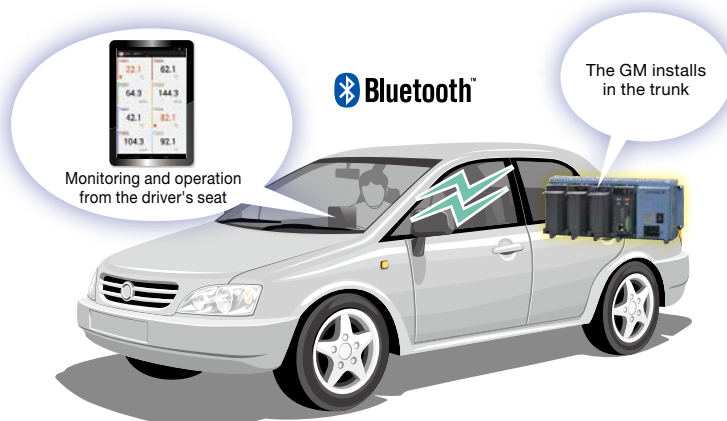

# Smart Functionality


Offers a seamless data transfer environment

## Data acquisition on power measuring instruments (optional codes /E2 and /MC)

Acquire precise digital data on the GM by digital communication connectivity to a power measuring instrument (WT series power analyzers) and record it along with the GM's measured data. Since it records a device's power consumption, temperature, and other phenomena at the same time, the GM is ideal for performance evaluation testing.

**Models that can be connected**  
Yokogawa Meters & Instruments Corp. WT300/WT500/WT1800

**Max. no. of connections**  
16

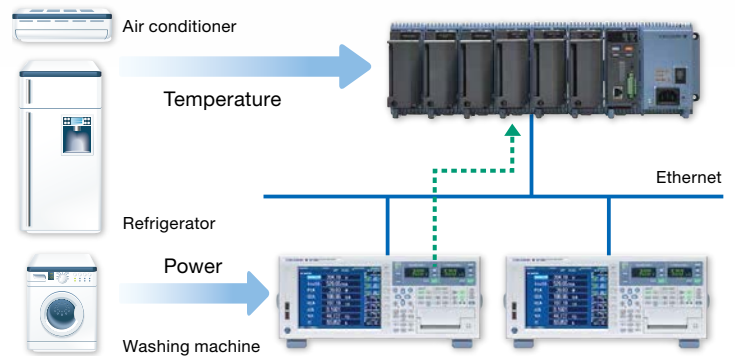


## Comes with communication functions that are compatible with the DARWIN data acquisition unit

The GM supports DARWIN communication commands. Use your current DARWIN communication programs as-is on the GM. It's easy to switch from an existing DARWIN unit.

\* See your dealer or nearest Yokogawa representative for details.

**CENTUM/STARDOM communication package**  
CENTUM: LFS2432, DARWIN/DAQSTATION Communication package (for ALE111 [Ethernet])  
STARDOM: NT365AJ DARWIN connection package

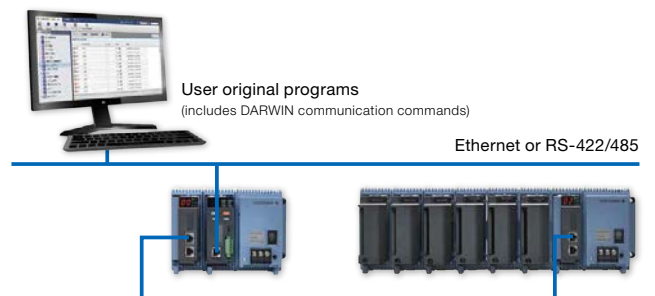


## Variety of convenient networking functions

Supports a wide range of networking functions

- Automatic network setup via DHCP
- SNTP based time synchronization
- Email transmission


## Increased network security with SSL communication

Safely sends and receives customer data.

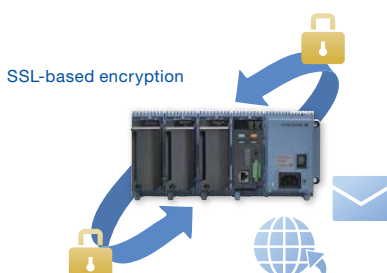

## FTP-based file transfer

The FTP client/server functions allow you to easily share and manage data from a centralized file server

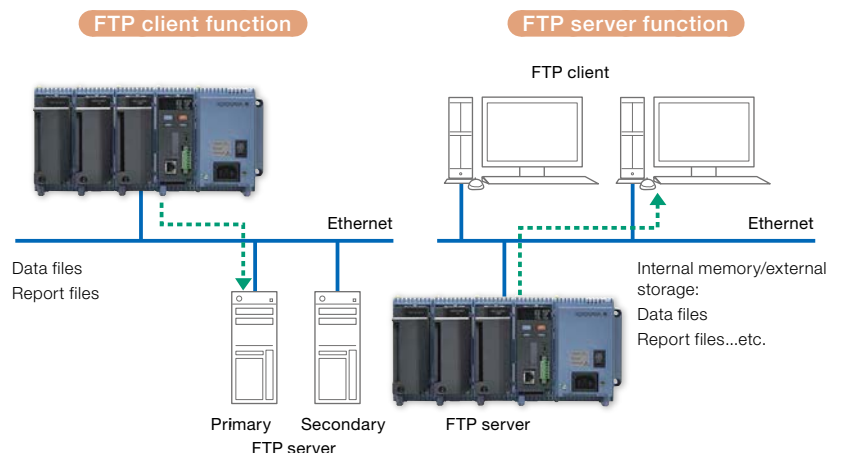




## EtherNet/IP Function (optional code /E1)

GM supports EtherNet/IP server functions. You can access GM from PLCs or other devices and load measurement/MATH channels or write to communication input channels\*.

\* Communication channel function (optional code, /MC) is required.

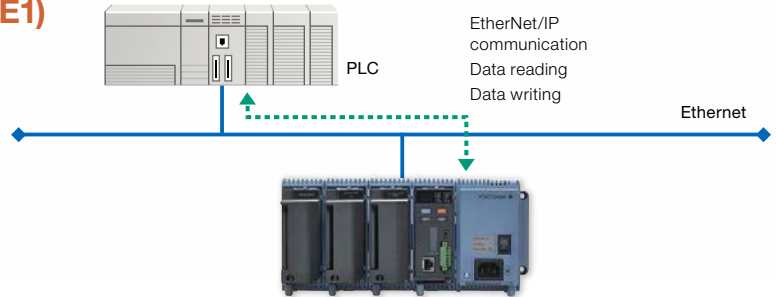


## Modbus/TCP and Modbus/RTU Communications

GM supports Modbus TCP/IP client and server modes for Ethernet communications and Modbus RTU master and slave modes for optional serial communications.


### Modbus TCP (Ethernet connection)

Modbus client

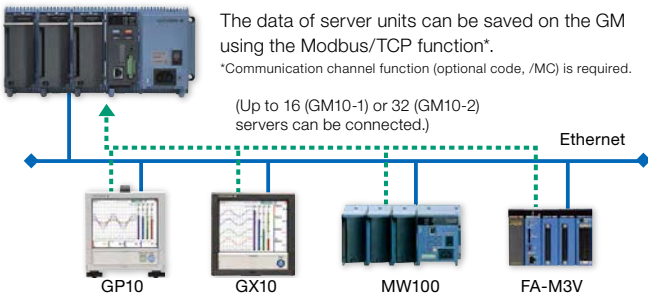


### Modbus RTU (RS-422/485 connection)

Modbus master

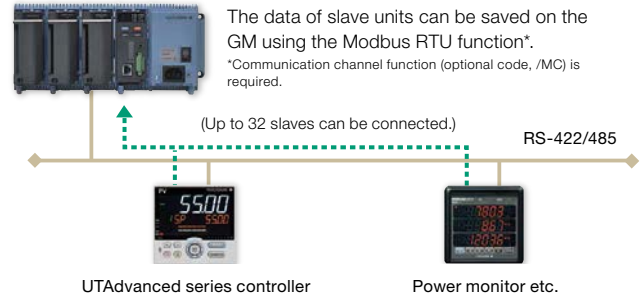


## SLMP Communication (Mitsubishi PLC) (optional code /E4)

Protocol function that enables connection from a GM to Mitsubishi Electric PLCs without sequencer programs.

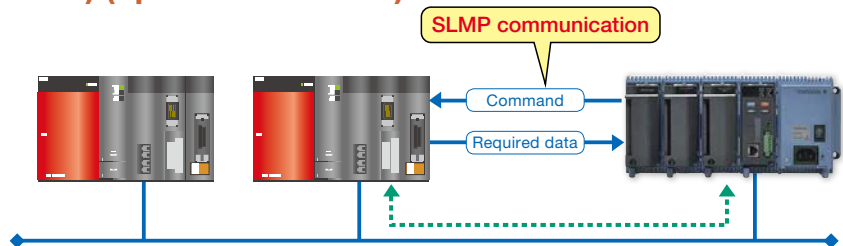

## OPC-UA Server (optional code /E3)

Data acquired by the GM can be accessed through Ethernet communication from a host system (OPCUA client).

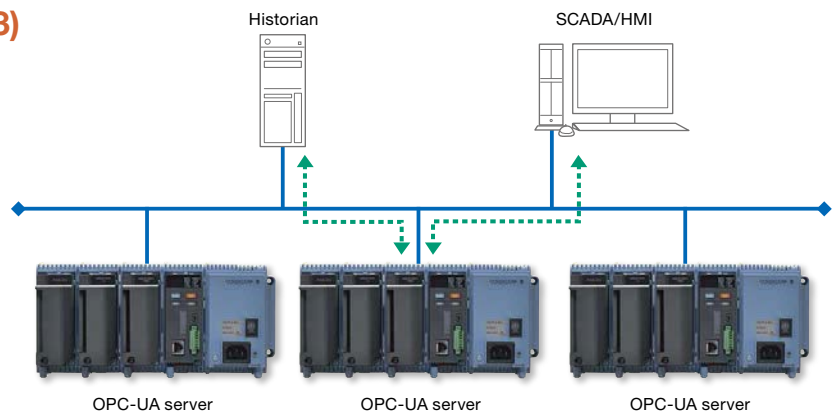

# Smart Functionality

## Be confident that recorded data is saved

Supports long-duration and multichannel recording. Measured data is always stored to internal memory, and data is transferred to external storage media at regular intervals. Redundancy can be achieved by sending data to a server with the FTP client function. Securely saves measured data even in the event of a sudden power loss.


### Approximate sample time

Number of recording channels	Total sample time
30	Approx. 71 days
100	Approx. 23 days
300	Approx. 7 days

With an internal memory of 1.2 GB and recording interval of 1 sec.

### Measured data file type

You can save measured data to editable text files, or to binary files for added security.

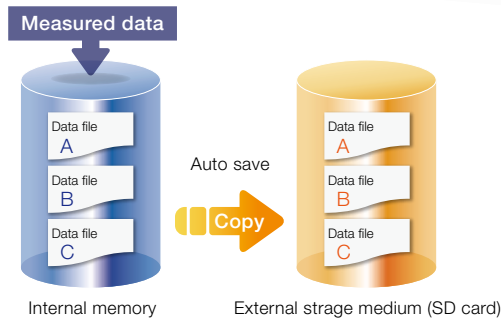

FDA 21 CFR PART 11


## 21 CFR Part 11 support (optional code /AS)

With the advanced security function option, GM supports the USA FDA's Title 21 CFR Part 11 regulation.

It gives you access to a login function for requiring user names, IDs, and passwords, plus electronic signatures, audit trails, an anti-tampering function, and other security features.

## Report template function (optional code /MT)

This function automatically creates spreadsheets in PDF or Excel format.

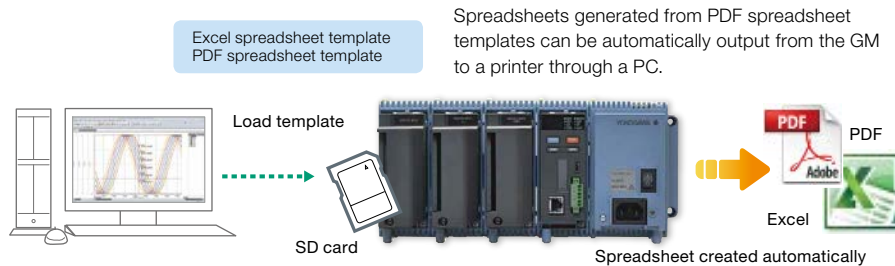


Spreadsheets are created according to the template loaded on the main unit. Templates are available for Excel and PDF. PDF spreadsheet templates are created with a free report template builder program.

Spreadsheets generated from PDF spreadsheet templates can be automatically output from the GM to a printer through a PC.

Automatically generated spreadsheets (PDF or Excel) are saved to external storage medium (SD card) at regular intervals. You can also transfer them via FTP.

### Print spreadsheets (PDF) directly

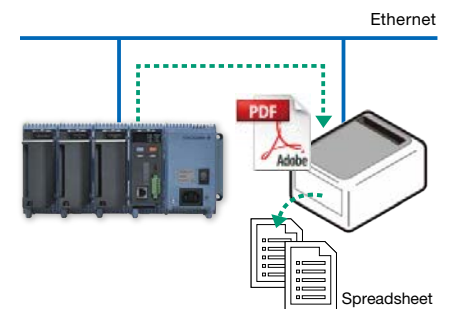


Spreadsheets generated from PDF spreadsheet templates can be automatically output from the GM to a printer through a PC.

## Record data in separate files per equipment set

### Multi-batch Function (optional code /BT)


Record pre-defined channel groups to separate data files with independent start and stop control. You can create up to 12 batches.

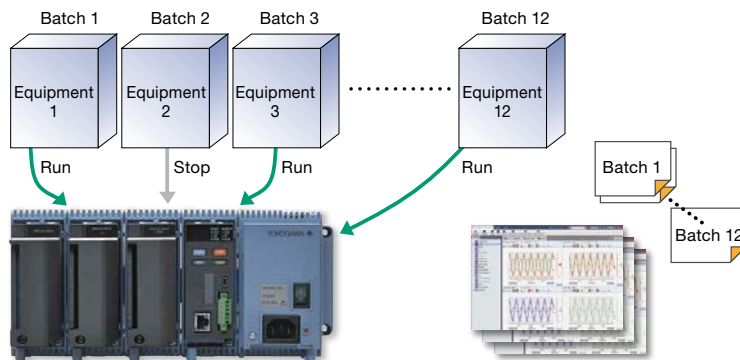

## Aerospace Heat Treatment Supports heat treatment application AMS2750/NADCAP

### Calibration correction schedule control function (optional code /AH)

Schedule management for periodically executing calibration correction configuration and the like.

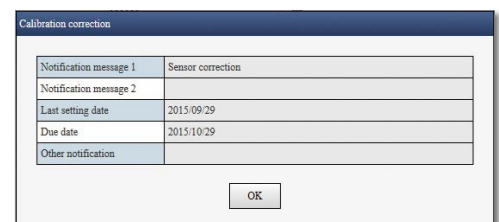

Input calibration is performed in the AI channel setting screen, and the calibration period settings are entered in the schedule management setting screen.

# Specifications

For detailed specs, see the general specifications (data acquisition module/power supply module/module base: GS 04L55B01-01EN, expansion unit/expansion modules: GS 04L53B00-01EN, I/O modules: GS 04L53B01-01EN).

Standards supported



## GM10 Data Acquisition Module

<b>No. of I/O channels:</b>	GM10-1: 100 max. GM10-2: 500 max. (or 420 with AI only)
<b>Scan interval:</b>	100/200/500 ms/1/2/5 s * Some intervals not available depending on system configuration and modules.
<b>Internal memory (flash memory):</b>	GM10-1: 500 MB GM10-2: 1.2 GB
<b>External storage media:</b>	SD memory card (SD/SDHC), up to 1–32 GB (1 GB incl.) Format: FAT32 or FAT16
<b>Data types:</b>	Event, display, alarm summary, manual sample, settings, and report (optional code /MT)
<b>Data format:</b>	Binary or text
<b>Alarms:</b>	Number: Max. 4 alarms per measurement channel Types: high limit, low limit, difference high limit, difference low limit, rate of change increase, rate of change decrease, delay high, delay low
<b>Event actions:</b>	Specified actions can be performed when certain events occur. Number: 50 Events: alarms, remote control input, etc.; Actions: record stop/start, alarm ACK, etc. Timers: 12 Match time timers: 12
<b>Batch function:</b>	Manage data by batch name. Enter text fields and batch comments in data files.
<b>Calibration correction mode:</b>	Off, linearizer approximation, linearizer bias
<b>Security functions:</b>	Key lock and login functions.
<b>Insulation resistance:</b>	Between RS-422/485/Ethernet terminals and internal circuitry: 20 M $\Omega$ or greater (at 500 VDC)
<b>● Ethernet</b>	
<b>Electrical/mechanical specifications:</b>	IEEE 802.3 compliant (Ethernet frame type: DIX specification)
<b>Implemented protocols:</b>	TCP, UDP, IP, ICMP, ARP, DHCP, HTTP, FTP, SMTP, SNMP, Modbus, dedicated protocol, SSL, DARWIN-compatible communication
<b>● USB communication</b>	
<b>Standards conformity:</b>	USB 2.0 compliant (recognized as a serial port by the PC)
<b>Connector format/no. of ports:</b>	mini B/1
<b>Implemented protocol:</b>	Dedicated protocol
<b>● RS-422/485 (optional code /C3)</b>	
<b>Media:</b>	EIA RS-422/485 compliant
<b>Implemented protocol:</b>	Dedicated protocol, Modbus/RTU, or DARWIN compatible communication
<b>● Bluetooth (optional code /C8)</b>	
<b>Standards conformity:</b>	Bluetooth® Ver 2.1+EDR compliant
<b>Supported profiles:</b>	SPP (serial port profile)
<b>Communication range:</b>	Approx. 10 m (depending on operating environment) (Class2)
<b>Implemented protocol:</b>	Dedicated protocol
<b>● Ethernet/IP communications (optional code /E1)</b>	
<b>Can join Ethernet/IP networks as an adapter (server).</b>	
<b>Max. connections:</b>	20 (or 10 max. at TCP/IP level)
<b>Supported protocols:</b>	EIP/PCCC, EIP/native
<b>Messaging:</b>	Explicit (UCMM Class 3) +I/O (Class 1)
<b>Objects:</b>	Assembly, PCCC, Data Table
<b>● WT communication (optional code /E2)</b>	
<b>Models supported:</b>	WT1800, WT500, WT300
<b>Supported communication:</b>	Ethernet
<b>Max. connected units:</b>	16
<b>Communication interval:</b>	500 ms/1 s/2 s/5 s/10 s/20 s/30 s
<b>Acquirable data types:</b>	Voltage, current, power, power factor, phase, watt hours, harmonics, and others.
<b>Max. data assignments:</b>	300
<b>● OPC-UA Server (optional code /E3)</b>	
<b>Communication:</b>	
<b>Type:</b>	OPC-UA Server
<b>Encoding:</b>	UA Binary
<b>Protocol:</b>	OPC UA TCP
<b>Maximum number of connections:</b>	3 sessions
<b>Profile:</b>	Micro Embedded Device Server
<b>Data acquisition:</b>	Measurement channel, computation channel, communication channel value and alarm status
<b>Data writing:</b>	Measurement channel (DO channel only), communication channel
<b>Port number:</b>	4840 (changeable: 1 to 65535)
<b>Number of items:</b>	300 max. (MonitoredItem/Session)
<b>Fastest period:</b>	100 ms
<b>● SLMP Communication (Mitsubishi PLC) (optional code /E4)</b>	
<b>Number of connection destination servers:</b>	16 max.
<b>Read cycle:</b>	100 ms, 200 ms, 500 ms, 1 s, 2 s, 5 s, 10 s, 20 s, 30 s, 1 min

<b>Communicable internal data:</b>	Special relay (SM), special register (SD), input (X), output (Y), internal relay (M), latch relay (L), annunciator (F), edge relay (V), link relay (B), data register (D), link register (W), timer contact (TS), timer coil (TC), current timer value (TN), integration timer contact (SS), integration timer coil (SC), current integration timer value (SN), counter contact (CS), counter coil (CC), current counter value (CN), special link relay (SB), special link register (SW), direct access input (DX), direct access output (DY), index register (Z), file register (R, ZR), extended data register (D), extended link register (W) Device code is indicated in parentheses.
<b>● MATH (with Report function, optional code /MT)</b>	
<b>No. of MATH channels:</b>	GM10-1: 100, GM10-2: 200
<b>MATH types:</b>	Basic math, statistics, special operators, conditional statements, and others.
<b>● Communication channels (optional code /MC)</b>	
<b>No. of communication channels:</b>	GM10-1: 300 (C001–C300) GM10-2: 500 (C001–C500)
<b>● Log scale (optional code /LG)</b>	
<b>Input types:</b>	LOG input, pseudo log (input that supports pseudo log), LOG linear (linear input within the log decade)
<b>Scalable range:</b>	LOG input: 1.00E-15 to 1.00E+15 (max. 15 decades), [scale low limit] < [scale high limit] Pseudo log input/LOG linear: 1.00E-15 to 1.00E+15 (max. 15 decades), the mantissa of the scale low and high limits are assumed to be the same.
<b>● Multi-batch Function (optional code /BT)</b>	
<b>Number of multi batches:</b>	GM10-1: 6 max., GM10-2: 12 max.
<b>● Aerospace Heat Treatment (optional code /AH)</b>	
<b>Number of manageable schedules:</b>	GM10-1: 6 max., GM10-2: 12 max.
<b>Calibration correction mode:</b>	Off, linearizer approximation, linearizer bias, correction coefficient
<b>Number of set points:</b>	2 to 12

## GM90PS Power Supply Module

<b>Rated supply voltage:</b>	100–240 VAC, 12–28 VDC (GM90PS-1N2W0)
<b>Operating supply voltage:</b>	90–132 VAC, 180–264 VAC, 10–32 VDC (GM90PS-1N2W0)
<b>Power frequency (AC power supply):</b>	50 Hz $\pm$ 2%, 60 Hz $\pm$ 2%
<b>Insulation resistance:</b>	Between power terminal and earth: 20 M $\Omega$ or more (at 500 VDC)
<b>Withstand voltage:</b>	Between power terminal and earth: 3000 VAC (50/60 Hz), 1 minute 1000 VAC (50/60 Hz) for 1 minute (GM90PS-1N2W0)

## GX90XA Analog Input Module

<b>Universal input (-U2), low withstand voltage relay (-L1), electromagnetic relay (-T1)</b>	
<b>Inputs:</b>	10
<b>Input types:</b>	Universal: DC voltage, standard signal, thermocouple, RTD, DI (voltage contact), DC current (with external shunt resistor connected) Low withstand voltage relay, electromagnetic relay: DC voltage, standard signal, thermocouple, DI (voltage, contact), DC current (with external shunt resistor connected)
<b>Integral time:</b>	Universal: 1.67 ms/16.7 ms/20 ms/36.7 ms/100 ms Low withstand voltage relay, electromagnetic relay: 16.7 ms/20 ms/36.7 ms/100 ms
<b>Input calculation:</b>	Linear scaling, square root, differential calculations
<b>Input range/accuracy:</b>	Refer to the Measurement range and accuracy table.
<b>Input resistance:</b>	10 M $\Omega$ or more for thermocouple/DC voltage (1 V range or lower) Approx. 1 M $\Omega$ for DC voltage (2 V range or higher)/standard signal
<b>Input external resistance:</b>	2 k $\Omega$ or lower for thermocouple/DC voltage
<b>Effect of signal source resistance:</b>	$\pm$ 10 $\mu$ V/1 k $\Omega$ or lower for thermocouple/DC voltage (1 V range or lower) $\pm$ 0.15%/1 k $\Omega$ or lower for DC voltage (2 V range or higher)/standard signal
<b>Allowable wiring resistance:</b>	Max. 10 $\Omega$ /1 wire or less (lead resistance between 3 wires is equal) for RTD input
<b>Effect of wiring resistance:</b>	$\pm$ 0.1 $^{\circ}$ C/10 $\Omega$ (lead resistance between 3 wires is equal) for RTD input
<b>Reference junction compensation accuracy:</b>	Measurement of 0 $^{\circ}$ C or higher, input terminal temp. balanced Type K, E, J, T, N, XK GOST: $\pm$ 0.5 $^{\circ}$ C (23 $^{\circ}$ C $\pm$ 2 $^{\circ}$ C), $\pm$ 0.7 $^{\circ}$ C (0 to 50 $^{\circ}$ C), $\pm$ 1.0 $^{\circ}$ C (-20 to 60 $^{\circ}$ C) Type R, S, W, L, U, W97Re3-W75Re25, platinum 2, NiNiMo, W/WRe26, N(AWG14): $\pm$ 1.0 $^{\circ}$ C (23 $^{\circ}$ C $\pm$ 2 $^{\circ}$ C), $\pm$ 1.4 $^{\circ}$ C (0 to 50 $^{\circ}$ C), $\pm$ 2.0 (-20 to 60 $^{\circ}$ C) Type KpvsAu7Fe: $\pm$ 1.0 K (23 $^{\circ}$ C $\pm$ 2 $^{\circ}$ C), $\pm$ 1.4 K (0 to 50 $^{\circ}$ C), $\pm$ 2.0 K (-20 to 60 $^{\circ}$ C) Type B, PR20-40: RJC fixed at 0 $^{\circ}$ C * Parentheses ( ) = ambient temperature.
<b>Allowable input voltage:</b>	$\pm$ 60V DC for DC voltage (2 V range or higher)/standard signal $\pm$ 10 V DC for other conditions.
<b>Noise rejection ratio:</b>	Normal mode: 50/60 Hz no rejection (integral time 1.67 ms), 40 dB or more (integral time 16.67 ms or more) Common mode: 80 dB or more (integral time 1.67 ms), 120 dB or more (integral time 16.67 ms or more)
<b>Max. common mode voltage:</b>	30 VACrms (50/60Hz), or 60 VDC (however, max. common mode noise voltage of measurement input is 250 VACrms)
<b>Max. voltage between measurement input channels:</b>	Universal, electromagnetic relay: 30 VACrms (50/60Hz), or 60 VDC (however, max. common mode noise voltage between measurement input channels is 250 VACrms) Low withstand voltage relay: 30 VACrms (50/60Hz), or 60 VDC (however, max. common mode noise voltage between measurement input channels is 60 VACrms)
<b>Effects of ambient temperature:</b>	Applies when integral time is 16.67 ms or higher, $\pm$ (0.05% of rdg + 0.05% of range) or less fluctuation per 10 $^{\circ}$ C change Note, KpvsAu7Fe, PR20-40: $\pm$ (0.05% of rdg + 0.1% of range) or less Cu10 $\Omega$ system: $\pm$ (0.2% of range + 0.1 $^{\circ}$ C) or less Excluding guaranteed reference junction accuracy

**Insulation resistance:** Between input terminals and internal circuitry: 20 MΩ or greater (at 500 VDC)

**Withstand voltage:** Universal, electromagnetic relay:  
Between input terminals and internal circuitry: 3000 VAC, 1 minute  
Between analog input channels: 1000 VAC, 1 minute (excluding b terminal)  
Low withstand voltage relay:  
Between input terminals and internal circuitry: 1500 VAC, 1 minute  
Between analog input channels: 400 VAC, 1 minute

#### DC current (mA) input (-C1)

**Inputs:** 10

**Input types:** DC current (20 mA), standard current signal (4–20 mA)

**Integral time:** 1.67 ms/16.7 ms/20 ms/36.7 ms/100 ms

**Input calculation:** Linear scaling, square root, differential calculations

**Input range:** Refer to the Measurement range and accuracy tables.

**Input resistance:** 250 Ω

**Allowable input voltage:** ±10 VDC

**Allowable input current:** 24 mA \*50/60 Hz, peak value including the signal portion

**Noise rejection ratio:** Normal mode: 50/60 Hz no rejection (integral time 1.67 ms), 40 dB or more (integral time 16.67 ms or more)  
Common mode: 80 db or more (integral time 1.67 ms), 120 dB or more (integral time 16.67 ms or more)

**Max. common mode voltage:** 30 VACrms (50/60Hz) or 60 VDC (however, max. common mode noise voltage of measurement input is 250 VACrms)

**Max. voltage between measurement input channels:** 30 VACrms (50/60Hz) or 60 VDC (however, max. common mode noise voltage between measurement input channels is 250 VACrms)

**Effects of ambient temperature:** Applies when integral time is 16.67 ms or more, ±(0.075% of rdg + 0.05% of range) or less fluctuation per 10°C change

**Insulation resistance:** Between input terminals and internal circuitry: 20 MΩ or greater (at 500 VDC)

**Withstand voltage:** Between input terminals and internal circuitry: 1500 VAC, 1 minute  
Between analog input channels: 1000 VAC, 1 minute

#### GX90XD Digital Input Module

**Inputs:** 16

**Input format:** Open collector or non-voltage contact

**Range types:** DI, pulse (250Hz (The chattering filter: OFF), 125Hz (The chattering filter: ON), min. pulse width: 2 ms, requires the MATH (optional code /MT)).

**ON/OFF detection:** Open collector: Voltage of 0.5 VDC or less when ON, leakage current of 0.5 mA or less when OFF  
Non-voltage contact: Contact resistance of 200 Ω or less when ON, 50 kΩ or more when OFF

**Input calculation:** Linear scaling, differential calculations

**Contact rating:** 12 VDC, 20 mA or more

**Input resistance:** Approx. 1 kΩ

**No. of common:** 2 (1 common per 8 channels)

**Allowable input voltage:** 10 V

**Insulation resistance:** Between input terminals and internal circuitry: 20 MΩ or greater (at 500 VDC)

**Withstand voltage:** Between input terminals and internal circuitry: 1500 VAC, 1 minute

#### GX90YD Digital Output Module

**Outputs:** 6

**Output format:** Relay contact (c contact)

**Rated load voltage:** 30 VDC or 250 VAC or less

**Max. load current:** 3 A (DC)/3 A (AC), resistive load, each

**Min. load voltage/current:** 5 VDC/10 mA

**No. of common:** 6 (all outputs independent)

**Insulation resistance:** Between output terminals and internal circuitry: 20 MΩ or greater (at 500 VDC)

**Withstand voltage:** Between output terminals and internal circuitry: 3000 VAC, 1 minute

#### GX90WD Digital Input/output Module

##### ● Digital input (DI) section

**Inputs:** 8

**Input format:** Open collector or non-voltage contact

**Range types:** DI, pulse (250Hz (The chattering filter: OFF), 125Hz (The chattering filter: ON), min. pulse width: 2 ms, requires the MATH (optional code /MT)).

**ON/OFF detection:** Open collector: Voltage of 0.5 VDC or less when ON, leakage current of 0.5 mA or less when OFF  
Non-voltage contact: Contact resistance of 200 Ω or less when ON, 50 kΩ or more when OFF

**Input calculation:** Linear scaling, differential calculations

**Contact rating:** 12 VDC, 20 mA or more

**Input resistance:** Approx. 2.4 kΩ

**No. of common:** 1 (1 common per 8 channels)

**Allowable input voltage:** 10 V

**Insulation resistance:** Between input terminals and internal circuitry: 20 MΩ or greater (at 500 VDC)

**Withstand voltage:** Between input terminals and internal circuitry: 1500 VAC, 1 minute

##### ● Digital output (DO) section

**Outputs:** 6

**Output format:** Relay contact (c contact)

**Rated load voltage:** 150 VAC or less when connected to the main circuit (first-order power supply)  
250 VAC or less when connected to a circuit derived from the main circuit (second-order power supply), or 30 VDC or less

**Max. load current:** 2 A (DC)/2 A (AC), resistive load, each

**Min. load voltage/current:** 5 VDC/10 mA

**No. of common:** 6 (all outputs independent)

**Insulation resistance:** Between output terminals and internal circuitry: 20 MΩ or greater (at 500 VDC)

**Withstand voltage:** Between output terminals and internal circuitry: 2700 VAC, 1 minute

#### GX90XP Pulse Input Module

**Number of inputs:** 10

**Measurement interval:** 100 ms (shortest)

**Input type:** Contact (open collector, voltage-free contact), level (5 V logic)

**Input range:** Up to 20 kHz  
30 Hz when the chattering filter is in use (On)

**Minimum detection pulse width:** 25 μs  
15 ms when the chattering filter is in use (On)

**Measurement accuracy:** Count ± 1 pulse  
During integration, the following accuracies are added.  
Upon MATH start: +1 measuring period  
Upon MATH stop: -1 measuring period  
\* Integration requires the math function (optional code /MT).

**Chattering filter:** Removes chattering up to 5 ms (can be turned on/off on each channel)

**Hysteresis width:** Approx. 0.2 V

**Contact, transistor rating:** Contact: 15 V DC or higher and 30 mA or higher rating. Minimum applicable load current 1 mA or less.  
Transistor: With the following ratings: Vce>15 VDC, Ic>30 mA

**Maximum input voltage:** ±10 V DC

**Insulation resistance:** Between input terminals and internal circuitry: 20 MΩ or greater at 500 V DC

**Withstand voltage:** Between input terminals and internal circuitry: 1500 V AC for 1 minute

#### GX90EX Expansion Module

Connects via dedicated communication between main unit and subunits, and between subunits.

**Communication speed:** 10Base-T/100Base-TX (Auto)

**Ports:** 2

**Connection cable:** STP cable, CAT5 or later

**Connection between modules:** Cascade connection (no ring connection)

**Communication range:** 100 m

#### SMARTDAC+ GM common specifications

##### ● Standards supported

**CSA:** CSA22.2 No.61010-1, installation category II, pollution degree 2  
CSA 22.2 No.61010-2-030-12

**UL:** UL61010-1, UL61010-2-030 (CSA NRTL/C)

**CE:** EMC directive: EN61326-1 Class A Table 2  
EN61000-3-2  
EN61000-3-3  
EN55011 Class A Group 1  
EN61010-1, EN61010-2-030  
Low voltage directives: EN61010-1, EN61010-2-030  
Installation category II, pollution degree 2, measurement category II  
R&TTE directive (optional code /C8): HEALTH&SAFETY  
EN61010-1  
EN61010-2-030  
Installation category II, pollution degree 2, measurement category II  
EN62311  
EMC  
EN301 489-1  
EN301 489-17  
EN61326-1  
SPECTRUM  
EN300 328

**EMC Regulatory Arrangement in Australia and New Zealand (RCM):** EN55011 Class A Group 1

**Wireless communication standards of Australia and New Zealand (RCM) (optional code /C8):** AS/NZS4268, AS/NZS2772.2

**KC marking:** Electromagnetic wave interference prevention standard, electromagnetic wave protection standard compliance

**Environmental performance:** WEEE directive support

**Wireless (Bluetooth):** Supports radio wave regulations of Japan, America, Canada, Europe (EU), Australia, New Zealand, China, and Korea.

##### ● Normal operating conditions

**Ambient temperature:** -20 to 60°C  
If less, -20 to 50°C  
· When using the GX90YD, GX90WD, and GX90XA-T1 (electromagnetic relay type)  
· With the GM10/C8 (Bluetooth option)

**Ambient humidity:** 20 to 85% RH (no condensation)

**Vibration:**  $5 \leq f < 8.4$  Hz amplitude 3.5 mm (peak)  
 $8.4 \leq f \leq 160$  Hz acceleration 9.8 m/s<sup>2</sup> (or less)

**Shock:** When ON, 98 m/s<sup>2</sup> or less, 11 ms, 3 times in 6 directions (±X, ±Y, ±Z), (excluding GX90YD and GX90WD)  
When OFF, 500 m/s<sup>2</sup> or less, approx. 10 ms, 3 times in 6 directions (±X, ±Y, ±Z)

**Magnetic field:** 400 A/m or less (DC and 50/60 Hz)

# Measurement range and accuracy\*1

Input	Type	Range	Measurement accuracy			
			A/D integration time: 16.7ms or more*2	A/D integration time: 1.67ms*3		
DCV	20mV	-20.000 to 20.000 mV	±(0.05 % of rdg +12 μV)	±(0.1 % of rdg +40 μV)		
	60mV	-60.00 to 60.00 mV	±(0.05 % of rdg +0.03 mV)	±(0.1 % of rdg +0.15 mV)		
	200mV	-200.00 to 200.00 mV	±(0.05 % of rdg +0.03 mV)	±(0.1 % of rdg +0.4 mV)		
	1V	-1.0000 to 1.0000 V	±(0.05 % of rdg +1.2 mV)	±(0.1 % of rdg +4 mV)		
	2V	-2.0000 to 2.0000 V	±(0.05 % of rdg +1.2 mV)	±(0.1 % of rdg +4 mV)		
	6V	-6.000 to 6.000 V	±(0.05 % of rdg +3 mV)	±(0.1 % of rdg +15 mV)		
	20V	-20.000 to 20.000 V	±(0.05 % of rdg +3 mV)	±(0.1 % of rdg +40 mV)		
Standard signal	0.4-2V	0.3200 to 2.0800 V	±(0.05 % of rdg +1.2 mV)	±(0.1 % of rdg +4 mV)		
	1-5V	0.800 to 5.200 V	±(0.05 % of rdg +3 mV)	±(0.1 % of rdg +15 mV)		
DC current	0-20mA	0.000 to 20.000mA	±(0.3 % of rdg +5 μA)	±(0.3 % of rdg +90 μA)		
DC current (standard signal)	4-20mA	3.200 to 20.800mA				
TC (Excluding RJC accuracy)	R	0.0 to 1760.0°C	±(0.15 % of rdg +1.0°C)	±(0.2 % of rdg +6.0°C)		
	S	0.0 to 1760.0°C	however, R, S; 0.0 to 800.0°C: ±2.2°C B; 400.0 to 800.0°C: ±3.0°C	However, R, S; 0.0 to 800.0°C: ±7.6°C B; 400.0 to 800.0°C: ±11.0°C		
	B	0.0 to 1820.0°C	Accuracy at less than 400.0°C not guaranteed	Accuracy at less than 400.0°C not guaranteed		
	K	-270.0 to 1370.0°C	±(0.15 % of rdg +0.7°C)	±(0.2 % of rdg +5.0°C)		
		-200.0 to 500.0°C	However, -200.0 to 0.0°C: ±(0.35 % of rdg +0.7°C) Accuracy at less than -200.0°C not guaranteed	However, -200.0 to 0.0°C: ±(3 % of rdg +5.0°C) Accuracy at less than -200.0°C not guaranteed		
	E	-270.0 to 800.0°C	±(0.15 % of rdg +0.5°C)	±(0.2 % of rdg +4.0°C)		
	J	-200.0 to 1100.0°C	However, -200.0 to 0.0°C: ±(0.35 % of rdg +0.5°C) Accuracy at less than -200.0°C not guaranteed	However, -200.0 to 0.0°C: ±(2 % of rdg +4.0°C) Accuracy at less than -200.0°C not guaranteed		
	T	-270.0 to 400.0°C	±(0.15 % of rdg +0.5°C)	±(0.2 % of rdg +2.5°C)		
	N	-270.0 to 400.0°C	However, -200.0 to 0.0°C: ±(0.35 % of rdg +0.5°C) Accuracy at less than -200.0°C not guaranteed	However, -200.0 to 0.0°C: ±(2 % of rdg +2.5°C) Accuracy at less than -200.0°C not guaranteed		
		-270.0 to 1300.0°C	±(0.15 % of rdg +0.7°C)	±(0.3 % of rdg +6.0°C)		
	W	0.0 to 2315.0°C	However, -200.0 to 0.0°C: ±(0.7 % of rdg +0.7°C) Accuracy at less than -200.0°C not guaranteed	However, -200.0 to 0.0°C: ±(5 % of rdg +6.0°C) Accuracy at less than -200.0°C not guaranteed		
	L	0.0 to 2315.0°C	±(0.15 % of rdg +1.5°C)	±(0.3 % of rdg +14.0°C) However, 1000.0°C or more: ±(0.8 % of rdg +9.0 °C)		
	U	-200.0 to 900.0°C	±(0.15 % of rdg +0.5°C)	±(0.2 % of rdg +4.0°C)		
	RTD	W97Re3- W75Re25	-200.0 to 400.0°C	Less than 0.0°C: ±(0.5 % of rdg +0.5°C)	Less than 0.0°C: ±(3 % of rdg +4.0°C)	
		KpvsAu7Fe	-200.0 to 400.0°C	±(0.15 % of rdg +0.5°C)	±(0.2 % of rdg +2.5°C)	
		Platinel2	-200.0 to 400.0°C	Less than 0.0°C: ±(0.7 % of rdg +0.5°C)	Less than 0.0°C: ±(3 % of rdg +2.5°C)	
		PR20-40	0.0 to 2320.0°C	±(0.2 % of rdg +2.5°C)	±18.0°C 2000.0°C or more: ±0.9 % of rdg	
		NiNiMo	0.0 to 300.0 K	±(0.15 % of rdg +2.0 K)	±(0.2 % of rdg +7.0 K)	
		W/WRe26	0.0 to 1395.0°C	±(0.25 % of rdg +2.3°C)	±(0.25 % of rdg +8.0°C)	
		N(AWG14)	0.0 to 1900.0°C	±(0.7 % of rdg +0.4°C)	±20.0°C	
XK GOST		0.0 to 1310.0°C	Accuracy at less than 800.0°C not guaranteed	Accuracy at less than 800.0°C not guaranteed		
Pt100		0.0 to 1310.0°C	±(0.25 % of rdg +0.7°C)	±(0.5 % of rdg +5.0°C)		
		-200.0 to 600.0°C	±(0.2 % of rdg +2.0°C)	±(0.4 % of rdg +12.0°C)		
JPt100		0.0 to 2320.0°C	Accuracy at less than 300.0°C not guaranteed	Accuracy at less than 300.0°C not guaranteed		
N(AWG14)		0.0 to 1300.0°C	±(0.2 % of rdg +1.3°C)	±(0.5 % of rdg +7.0°C)		
XK GOST		-200.0 to 850.0°C	±(0.25 % of rdg +0.8°C)	±(0.5 % of rdg +4.0°C)		
RTD	Pt100	-200.0 to 850.0°C	±(0.15 % of rdg +0.3°C)	±(0.3 % of rdg +1.5°C)		
	JPt100	-150.00 to 150.00°C				
	Cu10 GE	-200.0 to 300.0°C				
	Cu10 L&N	-200.0 to 300.0°C	±(0.2 % of rdg +2.0°C) Guaranteed measurement accuracy range Cu10 GE: -70.0 to 170.0°C Cu10 L&N: -75.0 to 150.0°C Cu10 WEED: -200.0 to 260.0°C Other: -200.0 to 300.0°C	±(0.4 % of rdg +6.0°C) Guaranteed measurement accuracy range Cu10 GE: -70.0 to 170.0°C Cu10 L&N: -75.0 to 150.0°C Cu10 WEED: -200.0 to 260.0°C Other: -200.0 to 300.0°C		
	Cu10 WEED	-200.0 to 300.0°C				
	Cu10 BAILEY	-200.0 to 300.0°C				
	Cu10 (20°C) alpha=0.00392	-200.0 to 300.0°C				
	Cu10 (20°C) alpha=0.00393	-200.0 to 300.0°C				
	Cu25 (0°C) alpha=0.00425	-200.0 to 300.0°C			±(0.3 % of rdg +0.8°C)	±(0.5 % of rdg +3.0°C)
	Cu53 (0°C) alpha=0.00426035	-50.0 to 150.0°C			±(0.15 % of rdg +0.8°C)	±(0.3 % of rdg +4.0°C)
	Cu100 (0°C) alpha=0.00425	-50.0 to 150.0°C	±(0.2 % of rdg +1.0°C)	±(0.4 % of rdg +5.0°C)		
	J263B	0.0 to 300.0 K	±1.0 K Less than 40.0 K: ±3.0 K	±3.0 K Less than 40.0 K: ±9.0 K		
	Ni100 (SAMA)	-200.0 to 250.0°C	±(0.15 % of rdg +0.4°C)	±(0.3 % of rdg +2.0°C)		
	Ni100 (DIN)	-60.0 to 180.0°C				
	Ni120	-70.0 to 200.0°C				
	Pt25	-200.0 to 550.0°C	±(0.15 % of rdg +0.8°C)	±(0.3 % of rdg +4.0°C)		
	Pt50	-200.0 to 550.0°C	±(0.3 % of rdg +0.6°C)	±(0.6 % of rdg +3.0°C)		
Pt200 WEED	-100.0 to 250.0°C	±(0.3 % of rdg +1.0°C)				
Cu10 GOST	-200.0 to 200.0°C	±(0.2 % of rdg +2.0°C)	±(0.4 % of rdg +6.0°C)			
Cu50 GOST	-200.0 to 200.0°C	±(0.15 % of rdg +0.6°C)	±(0.3 % of rdg +4.0°C)			
Cu100 GOST	-200.0 to 200.0°C	±(0.15 % of rdg +0.3°C)	±(0.3 % of rdg +1.5°C)			
Pt46 GOST	-200.0 to 550.0°C	±(0.3 % of rdg +0.8°C)	±(0.6 % of rdg +4.0°C)			
Pt100 GOST	-200.0 to 600.0°C	±(0.15 % of rdg +0.3°C)	±(0.3 % of rdg +2.0°C)			
DI	Level	Threshold level (Vth=2.4 V) accuracy ±0.1 V				
	Contact	1 kΩ or less: 1 (ON), 100 kΩ or more: 0 (OFF) (shunt capacitance 0.01 μF or less)				

\*1 Reference operating conditions: 23+/-2°C, 55+/-10% RH, supply voltage 90-132, 180-264 VAC, supply frequency within 50/60 Hz ±1%, warmup 30 minutes or more, no vibrations or other hindrances to performance.

Please inquire for modules with increased guaranteed accuracy specifications. rdg: reading value

\*2 10 channel mode with scan interval set to 500 ms or higher, or 2 channel mode

\*3 10 channel mode with scan interval set to 100 ms or 200 ms

# MODEL AND SUFFIX CODES

## GM10 MODEL AND SUFFIX CODES

Model	Suffix code	Optional code	Description
GM10			Data Acquisition Module for SMARTDAC+ GM
Type	-1		Standard (Max. measurement channels: 100 ch)
	-2		Large memory (Max. measurement channels: 500 ch)
Area		E	General (temp. unit: Cel, Deg F)
-		0	Always 0
Optional features		/AH	Aerospace heat treatment
		/AS	Advanced security function
		/BT	Multi-batch function
		/C3	RS-422/485
		/C8	Bluetooth
		/E1	EtherNet/IP communication (PLC communication protocol)
		/E2	WT communication *1
		/E3	OPC-UA sever
		/E4	SLMP communication (Mitsubishi PLC)
		/MT	Mathematical function (with report function) *2 *3
	/MC	Communication channel function	
	/LG	Log scale	

\*1: The Communication Channel function (optional code /MC) is required to specify WT communication (optional code /E2).

\*2: Optional code /MT (MATH) required if using the GX90XD's or GX90WD's pulse input.

\*3: Optional code /MT (MATH) required if using the GX90XP's pulse integration.

## GM90PS MODEL AND SUFFIX CODES

Model	Suffix code	Description
GM90PS		Power Supply Module for SMARTDAC+ GM
Type	-1	Always -1
Area		N
		General
Supply voltage		1
		2
		100 to 240 V AC
		12-28 VDC *
Power supply connection		D
		F
		H
		N
		Q
		R
		W
		Power inlet with UL/CSA cable
		Power inlet with VDE cable
		Power inlet with GB cable
		Power inlet with NBR cable
		Power inlet with BS cable
		Power inlet with AS cable
		Screw terminal (without power cable)
-		0
		Always 0


\* Only W (Screw terminal (M4)) is available for the power supply connection.

## GM90MB MODEL AND SUFFIX CODES

Model	Suffix code	Description
GM90MB		Module Base for SMARTDAC+ GM
-	-01	Always -01
Area		N
		General
-		0
		Always 0

## GX90XA MODEL AND SUFFIX CODES

Model	Suffix code	Description
GX90XA		Analog Input Module
Number of channels	-10	10 channels
Type	-C1	Current, scanner type (isolated between channels)
	-L1	DCV/TC/DI, low withstand voltage scanner type (isolated between channels)
	-U2	Universal, Solid state relay scanner type (3-wire RTD b-terminal common)
	-T1	DCV/TC/DI, Electromagnetic relay scanner type (isolated between channels)
		N
Terminal form		-3
		-C
		Screw terminal (M3)
		Clamp terminal
Area		N
		General

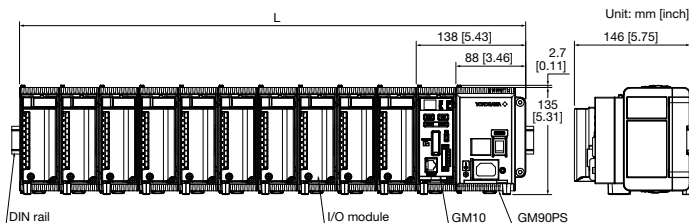

Connected modules	1	2	3	4	5	6	7	8	9	10	11
L (mm)	138 [5.43]	188 [7.40]	238 [9.37]	288 [11.34]	338 [13.31]	388 [15.28]	438 [17.24]	488 [19.21]	538 [21.18]	588 [23.15]	638 [25.12]

## Calibration certificate (sold separately)

A calibration certificate for specific analog input modules.

## Test certificate (QIC, sold separately)

A QIC for specific data acquisition modules, power supply modules, module bases, or I/O modules.

## GX90XD MODEL AND SUFFIX CODES

Model	Suffix code	Description
GX90XD		Digital Input Module
Number of channels	-16	16 channels
Type		-11
		N
		Open collector/Non-voltage, contact (shared common), Rated 5 VDC
-		N
		Always N
Terminal form		-3
		-C
		Screw terminal (M3)
		Clamp terminal
Area		N
		General

## GX90YD MODEL AND SUFFIX CODES

Model	Suffix code	Description
GX90YD		Digital Output Module
Number of channels	-06	6 channels
Type		-11
		N
		Relay, SPDT(NO-C-NC)
-		N
		Always N
Terminal form		-3
		Screw terminal (M3)
Area		N
		General

## GX90WD MODEL AND SUFFIX CODES

Model	Suffix code	Description
GX90WD		Digital Input/Output Module
Number of channels	-0806	8 channel DIs, 6 channel DOs
Type		-01
		N
		Open collector/non-voltage contact (shared common), rated 5 VDC; Relay, SPDT (NO-C-NC)
-		N
		Always N
Terminal form		-3
		Screw terminal (M3)
Area		N
		General

## GX90XP MODEL AND SUFFIX CODES

Model	Suffix code	Description
GX90XP		Pulse Input Module
Number of channels	-10	10 channels
Type		-11
		N
		DC voltage/open collector/non-voltage contact (shared common), rated 5 VDC
-		N
		Always N
Terminal form		-3
		-C
		Screw terminal (M3)
		Clamp terminal
Area		N
		General

## GX90EX MODEL AND SUFFIX CODES

Model	Suffix code	Description
GX90EX		I/O Expansion Module
Port		-02
Type		-TP1
		N
		Twisted pair cable
-		N
		Always N
Area		-N
		General

## Standard Accessories

Model	Product	Qty
GM10	SD memory card (1GB)	1
	Connector cover	1
GM90PS	Power cable (depends on the suffix code of the power supply connection)	1
	Interconnect screw (M3)	4
GM90MB	Interconnect screw (M3)	4

## Optional Accessories (Sold Separately)

Product	Part Number/Model
SD memory card (1GB)	773001
Shunt resistor for screw terminal (M3) (10 Ω ± 0.1%)	X010-010-3
Shunt resistor for screw terminal (M3) (100 Ω ± 0.1%)	X010-100-3
Shunt resistor for screw terminal (M3) (250 Ω ± 0.1%)	X010-250-3
Shunt resistor for clamp terminal (10 Ω ± 0.1%)	438922
Shunt resistor for clamp terminal (100 Ω ± 0.1%)	438921
Shunt resistor for clamp terminal (250 Ω ± 0.1%)	438920
Dummy cover	B8740CZ
Validation Documents (For /AS option)	773230

## Application Software (Sold Separately)

Model	Description	OS
GA10	Data Logging Software	Windows Vista/7/8.1/10 Windows Server 2008/2012

## User's Manual

Product user's manuals can be downloaded or viewed at the following URL. URL: [www.smartdacplus.com/manual/en/](http://www.smartdacplus.com/manual/en/)

## Configuration example

(with a supply voltage of 100-240 VAC, power inlet, universal input, and clamp terminal)

### Single-unit configuration example

#### 30 ch (analog input)

GM10-1E0	x	1
GM90PS-1N1D0	x	1
GX90XA-10-U2N-CN	x	3
GM90MB-01N0	x	4



#### 60ch (analog input)

GM10-1E0	x	1
GM90PS-1N1D0	x	1
GX90XA-10-U2N-CN	x	6
GM90MB-01N0	x	7



#### 100ch (analog input)

GM10-1E0	x	1
GM90PS-1N1D0	x	1
GX90XA-10-U2N-CN	x	10
GM90MB-01N0	x	11



### Multi-unit configuration example

#### 120ch (analog input)

GM10-2E0	x	1
GM90PS-1N1D0	x	2
GX90XA-10-U2N-CN	x	12
GX90EX-02-TP1N-N	x	2
GM90MB-01N0	x	15



#### 300ch (analog input)

GM10-2E0	x	1
GM90PS-1N1D0	x	5
GX90XA-10-U2N-CN	x	30
GX90EX-02-TP1N-N	x	5
GM90MB-01N0	x	36



#### 420ch (analog input)


GM10-2E0	x	1
GM90PS-1N1D0	x	7
GX90XA-10-U2N-CN	x	42
GX90EX-02-TP1N-N	x	7
GM90MB-01N0	x	50



## Data Logging Software GA10 (sold separately)

### Centrally acquire data from multiple devices on a PC

GA10 is a PC based software package that acquires real time data from SMARTDAC+ data acquisition systems and other devices connected to a network. Connected PCs can monitor real time and historical data, which can be stored on a PC harddrive or centrally on a network drive.

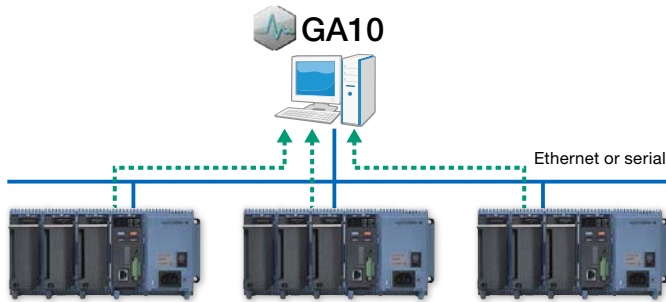

Max. connectable units : **100**  
 Max. recording tags (channels) : **2000**  
 Scan interval : **100 ms or higher**

Compatible with other models in addition to the GM!



MX/MW series



WT series (power analyzers)

Supports many other models. For details, see the GA10 catalog.

#### Aggregate data for monitoring!



Easy to read screen layouts provide operator friendly real time monitoring.

- Group channels any way you like
- Play back data up to recording start, even during measurement
- Instantly recognize alarms (in red)

#### Save the data all together!



Binary




Excel

Data is stored in a binary tamper proof format preventing unauthorized access. Data can also be exported to excel format for data manipulation and analysis.


### Application example

#### Recording data from multiple equipments

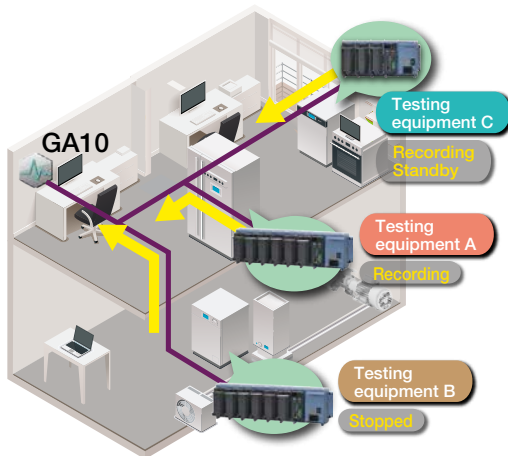

Saves testing/manufacturing equipment data on a PC. In addition to simultaneous acquisition, the multilogging function lets you acquire multiple data at different timing.

#### Multilogging

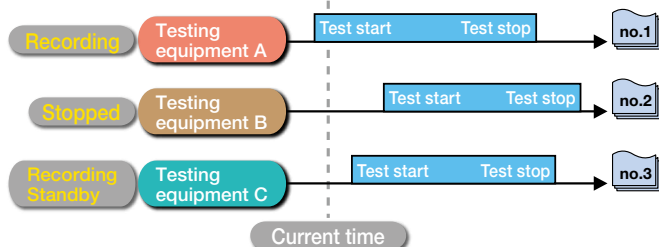

Effect : Manage all data on the PC, one set of equipment at a time!

vigilantplant, SMARTDAC+ and SMARTDACPLUS are registered trademarks of Yokogawa Electric Corporation. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the United States and other countries. Other company names and product names appearing in this document are registered trademarks or trademarks of their respective holders.

#### NOTICE



Before operating the product, read the instruction manual thoroughly for proper and safe operation.

**vigilantplant**<sup>®</sup>

The clear path to operational excellence

SEE  
CLEARLY

KNOW  
IN ADVANCE

ACT  
WITH AGILITY

VigilantPlant is Yokogawa's automation concept for safe, reliable, and profitable plant operations. VigilantPlant aims to enable an ongoing state of Operational Excellence where plant personnel are watchful and attentive, well-informed, and ready to take actions that optimize plant and business performance.

#### YOKOGAWA ELECTRIC CORPORATION

Control Instruments Business Division/Phone: (81)-422-52-7179, Fax: (81)-422-52-6973

E-mail: ns@cs.jp.yokogawa.com

#### YOKOGAWA CORPORATION OF AMERICA

Phone: 800-258-2552, Fax: (1)-770-254-0928

#### YOKOGAWA EUROPE B.V.

Phone: (31)-88-4641000, Fax: (31)-88-4641111

#### YOKOGAWA ENGINEERING ASIA PTE. LTD.

Phone: (65)-62419933, Fax: (65)-62412606

Sign up for our free e-mail newsletter  
[www.yokogawa.com/ns/](http://www.yokogawa.com/ns/)

Vig-RS-6E

Printed in Japan, 511 (AZ) [Ed : 02/d]

**YOKOGAWA**

Subject to change without notice

All Rights Reserved. Copyright © 2014, by Yokogawa Electric Corporation